

RECEIVED

JAN 30 1995

GROUP 2300

REQUEST FOR ACCESS

16  
Paper Number

RECEIVED

JAN 30 1995

GROUP 2300

DATE:

1/30/95

SERIAL NUMBER:

07/337,566

FILING DATE:

4/13/89

APPLICANTS:

\_\_\_\_\_

SIR:

THE UNDERSIGNED HEREBY RESPECTFULLY REQUESTS ACCESS TO THE FILE HISTORY OF THE FOLLOWING ABANDONED APPLICATION WHICH WAS REFERRED TO IN U.S. PATENT NUMBER 5,297,148 OR PRINTED APPLICATION \_\_\_\_\_.

RESPECTFULLY SUBMITTED.

Rara Fowler

OFFICIAL USE ONLY

\_\_\_\_\_  
Initials

File Information Unit

Best Copy

14-25  
20f3

# United States Patent [19] Harari et al.

[11] Patent Number: **5,297,148**  
[45] Date of Patent: **Mar. 22, 1994**

## [54] FLASH EEPROM SYSTEM

[75] Inventors: **Eliyahou Harari**, Los Gatos; **Robert D. Norman**, San Jose; **Sanjay Mehrotra**, Milpitas, all of Calif.

[73] Assignee: **SunDisk Corporation**, Santa Clara, Calif.

[21] Appl. No.: **963,838**

[22] Filed: **Oct. 20, 1992**

### Related U.S. Application Data

[62] Division of Ser. No. 337,566, Apr. 13, 1989, abandoned.

[51] Int. Cl.<sup>3</sup> ..... **G06F 11/00**

[52] U.S. Cl. .... **371/10.2; 371/10.1; 371/10.3; 365/200**

[58] Field of Search ..... **371/10.2, 10.1, 10.3, 371/40.1; 365/200**

### [56] References Cited

#### U.S. PATENT DOCUMENTS

4,601,031 7/1986 Walker et al. .... 371/10.3  
4,612,640 9/1986 Mehrotra et al. .... 371/40.1  
4,698,219 8/1987 Takemae et al. .... 371/10.3  
4,757,474 7/1988 Fukushi et al. .... 365/189


4,796,233 1/1989 Awaya et al. .... 371/10.2  
4,920,518 4/1990 Nakamura et al. .... 371/10.2  
4,949,309 8/1990 Rao ..... 365/218

*Primary Examiner*—Robert W. Beausoliel, Jr.  
*Assistant Examiner*—Ly V. Hua  
*Attorney, Agent, or Firm*—Majestic, Parsons, Siebert & Hsue

### [57] ABSTRACT

A system of Flash EEPROM memory chips with controlling circuits serves as non-volatile memory such as that provided by magnetic disk drives. Improvements include selective multiple sector erase, in which any combinations of Flash sectors may be erased together. Selective sectors among the selected combination may also be de-selected during the erase operation. Another improvement is the ability to remap and replace defective cells with substitute cells. The remapping is performed automatically as soon as a defective cell is detected. When the number of defects in a Flash sector becomes large, the whole sector is remapped. Yet another improvement is the use of a write cache to reduce the number of writes to the Flash EEPROM memory, thereby minimizing the stress to the device from undergoing too many write/erase cycling.

4 Claims, 5 Drawing Sheets

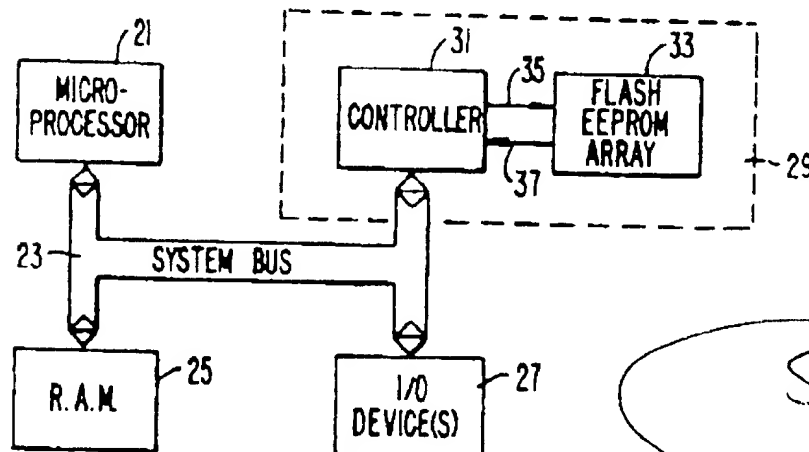

S-103

Best Available Copy

60.8627



US005297148A

## United States Patent [19]

[11] Patent Number: 5,297,148

Harari et al.

[45] Date of Patent: Mar. 22, 1994

## [54] FLASH EEPROM SYSTEM

4,796,233 1/1989 Awaya et al. .... 371/10.2

[75] Inventors: Eliyahou Harari, Los Gatos; Robert D. Norman, San Jose; Sanjay Mehrotra, Milpitas, all of Calif.

4,920,518 4/1990 Nakamura et al. .... 371/10.2

4,949,309 8/1990 Rao ..... 365/218

[73] Assignee: SunDisk Corporation, Santa Clara, Calif.

Primary Examiner—Robert W. Beausoliel, Jr.

Assistant Examiner—Ly V. Hua

Attorney, Agent, or Firm—Majestic, Parsons, Siebert &amp; Hsue

[21] Appl. No.: 963,838

[57]

## ABSTRACT

Filed: Oct. 20, 1992

## Related U.S. Application Data

[62] Division of Ser. No. 337,566, Apr. 13, 1989, abandoned.

[51] Int. Cl. .... G06F 11/00

[52] U.S. Cl. .... 371/10.2; 371/10.1; 371/10.3; 365/200

[38] Field of Search .... 371/10.2, 10.1, 10.3, 371/40.1; 365/200


## [56] References Cited

## U.S. PATENT DOCUMENTS

4,920,518 4/1990 Walker et al. .... 371/10.3  
4,912,667 9/1986 Mehrotra et al. .... 371/40.1  
4,632,219 8/1987 Takemae ..... 371/10.3  
4,537,474 7/1983 Fukushi et al. .... 365/189

A system of Flash EEPROM memory chips with controlling circuits serves as non-volatile memory such as that provided by magnetic disk drives. Improvements include selective multiple sector erase, in which any combinations of Flash sectors may be erased together. Selective sectors among the selected combination may also be de-selected during the erase operation. Another improvement is the ability to remap and replace defective cells with substitute cells. The remapping is performed automatically as soon as a defective cell is detected. When the number of defects in a Flash sector becomes large, the whole sector is remapped. Yet another improvement is the use of a write cache to reduce the number of writes to the Flash EEPROM memory, thereby minimizing the stress to the device from undergoing too many write/erase cycling.

4 Claims, 5 Drawing Sheets

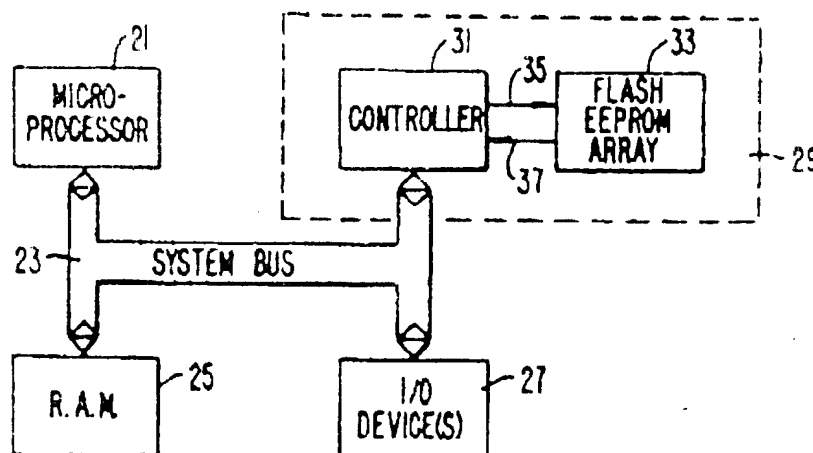

N105